


EX2X R01 - Dual X.21 Cable - Product Code XP8926

For use with FarSync T-Series cards

The twisted pairs within the cable to be utilised as follows, the pairings are as viewed on the 37 pin connector.

2-20, 3-21, 4-22, 5-23, 6-24, 7-26, 8-16, 9-27, 10-28, 11-32.

Physical Layout

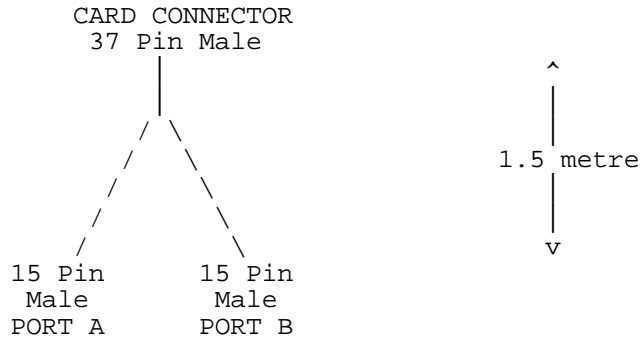

X.21 Pin Connections for Ports

CARD CONNECTOR	PORT A	PORT B	
37 pin male	15 pin male	15 pin male	
1	1	1	Shield
2	9		A.Tb
3	10		A.Cb
4	11		A.Rb
5	12		A.Ib
6	13		A.Sb
7		9	B.Tb
8		10	B.CB
9		11	B.Rb
10		12	B.Ib
11		13	B.Sb
13			
16		3	B.Ca
20	2		A.Ta
21	3		A.Ca
22	4		A.Ra
23	5		A.Ia
24	6		A.Sa
26		2	B.Ta
27		4	B.Ra
28		5	B.Ia
31			
32		6	B.Sa
37	8	8	signal ground